




# Digital Housing

## Supplemental Instructions

### 6210.62 Sony DSC-W620

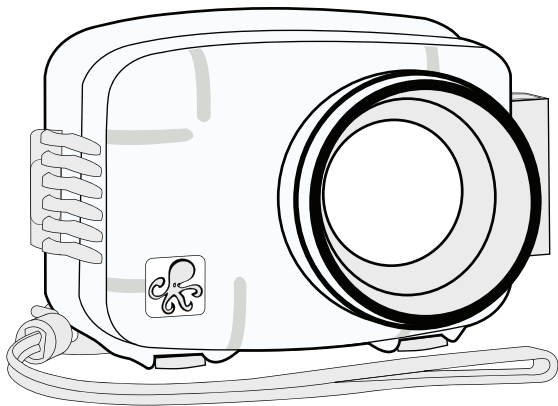

#### Size and Weight

Width .....6.2 in. (157mm) including controls

Height .....4.4 in. (112mm) including controls


Depth .....3.8 in. (97mm) including controls & lens port

Weight .....1.2 lb (544g)


Buoyancy .....Slightly positive in fresh water

# Parts of the Housing

## Front View

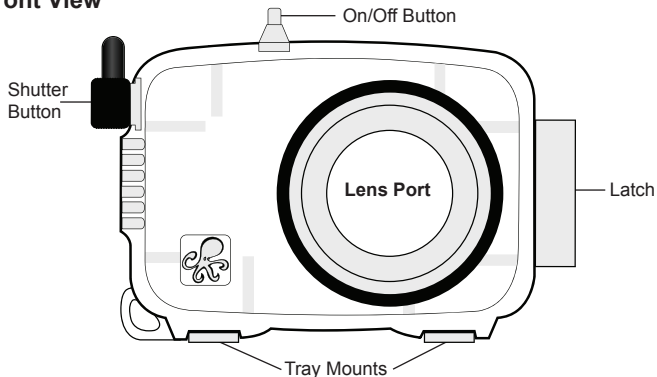


## Back View

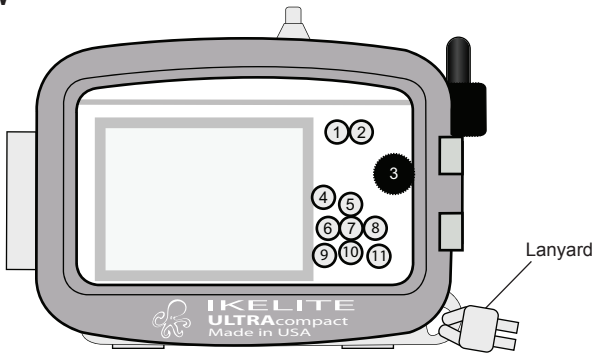

- |                     |              |                         |
|---------------------|--------------|-------------------------|
| 1. Zoom (wide)      | 5. Display ▲ | 9. Menu Button          |
| 2. Zoom (telephoto) | 6. Smile ◀   | 10. Self-Timer ▼        |
| 3. Mode Switch      | 7. Set ●     | 11. Guide ? / Delete 🗑️ |
| 4. Playback ▶       | 8. Flash ⚡ ▶ |                         |

## Initial Camera Settings

- Insert and Format an SD memory card.
- Set Date and Time.
- Set REC Mode to “P” Program Auto.
- Set Still Image Size to “14M.”
- Set ISO to “100.”
- Set White Balance to “WB Auto.”
- Set Focus to “Center AF.”
- Set Metering Mode to “Center.”
- Set DRO to “DRO STD.”
- Set Flash to “On  always use flash.”
- Set Red-Eye Reduction to “Off.”

**NOTE:** If overexposure occurs, use “-” exposure compensation and/or back away from your subject and zoom in. When using an AF35 strobe or manual controller, turn the power down.

## External Accessory Lenses

An external wide angle conversion lens increases angle of coverage so you can get much closer to your subject while still fitting everything in the frame. By reducing the amount of water between the subject and your camera lens, the resulting image will be more crisp and colorful.

Attach **67mm threaded** #6420 Ikelite W-20 and other compatible 67mm lenses directly to the front of the port. This housing is not compatible with bayonet style accessory lenses.


Slight to Moderate vignetting (shading in the corners) will be present in the widest angle camera setting when using an external accessory lens. This effect can be eliminated by zooming in slightly or cropping the image in post processing.

## AF35 Strobe Package 4035

The AutoFlash AF35 kit is a great compliment, and an effortless, affordable way to add a flash to your new Ikelite point and shoot camera system. Everything you need to get started is in the box. Just attach it to the bottom of your housing and start taking pictures!

### AF35 AutoFlash kit includes:

AF35 strobe - Flex arm - AutoFlash sensor  
Handle with rubber grip - Tray (single or dual)  
Mounting hardware.



A full range of accessories is available to support your housing. Please visit <http://www.ikelite.com> to see the most current information about recommended accessories for your housing.

## Ikelite Technical Support

Email: [ikelite@ikelite.com](mailto:ikelite@ikelite.com)

Phone 317.923.4523

Fax 317.924.7988



**Ikelite Underwater Systems**  
**50 West 33rd Street**  
**Indianapolis, IN 46208 USA**

[www.ikelite.com](http://www.ikelite.com)