



## **Flex Arm for Substrobe DS51**

### Installation Instructions

#### **Flex Arm System**

The Flex Arm utilizes "pop-bead" components which provide the necessary holding power yet effortless repositioning.

On land, the Flex Arm may not support the full weight of the DS51 Strobe. Over time the pop-beads will loosen slightly and may not hold the strobe in position on the surface. This is normal and will not adversely affect the arm holding power while underwater.


Additional pop-beads are available for purchase in four-piece lengths (Ikelite Product 9573.44).

#### **Installation Instructions** (Illustration on reverse side):

1. Determine the desired length of arm and add or subtract "pop-bead" components from the Flex Arm as necessary.
2. If not already attached, push the Flex Arm onto the Stem Ball as shown.
3. Push the DS51 Strobe Mount with pop-bead onto the other end of the Flex Arm. Firm pressure is necessary to attach the components.
4. Adjust strobe position as needed while underwater.
5. Whenever disassembling the unit, leave one pop-bead attached to both the DS51 Strobe Mount and the Stem Ball.

**CAUTION: Do not carry your system by the Flex Arm. The Flex Arm is not designed to be used as a carrying handle.**

## Illustration

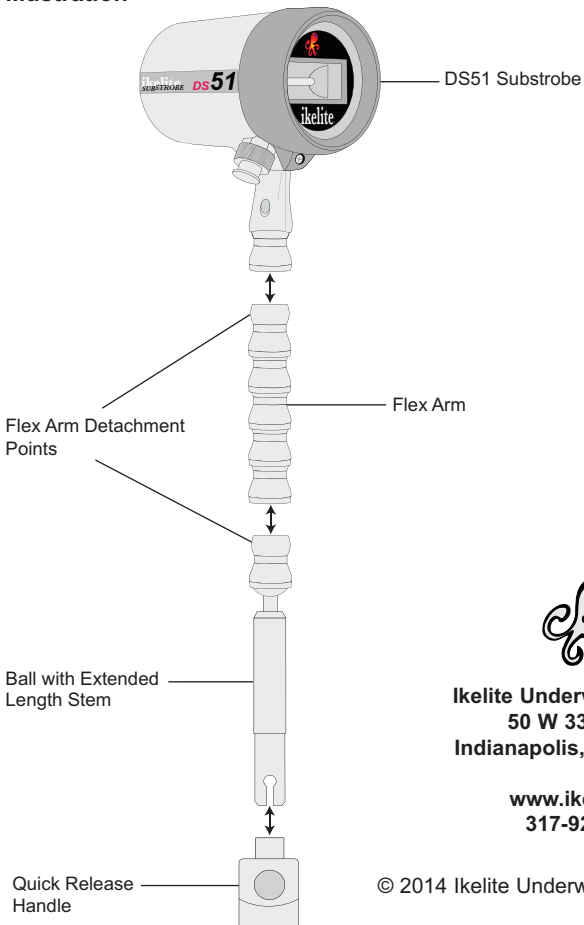

**Ikelite Underwater Systems**  
50 W 33rd Street  
Indianapolis, IN 46208 USA

**www.ikelite.com**  
317-923-4523

© 2014 Ikelite Underwater Systems

Flex Arm for DS51 Attachment\_03-0614