



Extension Cord

instruction manual

#4102.03 0.9M (3') Length

#4102.15 4.5M (15') Length

Extend the original photo sync cord length by using the Ikelite Extension Cord. The Extension Cord features one male and one female Ikelite 5-pin connector to secure between the following Ikelite photographic products. The strobe can be fired in TTL/auto and manual exposure modes.

Ikelite Extension Cord Can Be Used:

- Between Substrobe and Sync Cord
- Between DS Substrobe and Sync Cord
- Between Camera Housing and Sync Cord
- Between EV-Controller and DS Substrobe
- Between Pro Video-Lite Head and Battery Pack
- Between SpD Lite Head and Battery Pack

Note: Please read all instructions before using this product.

#4102.03 - 3' Length


#4102.15 - 15' Length



Connect the Cord

The Extension Cord features one male and one female end. Select the appropriate end when connecting between the two Ikelite products.

1. Make sure all components are dry.
2. Clean and lightly lubricate the male stem o-rings and female connector threads. Check the o-rings for nicks or cuts.
3. Note the positioning of the receptacles and pins. Properly align the end of the male connectors and insert into the female connectors.
4. Hand-tighten the knurled rings on the male connectors.
5. Push each male connector body further into the female connector and continue to tighten the knurled ring.

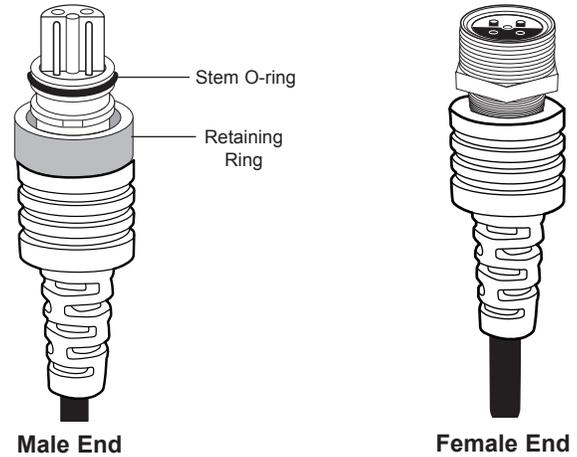

2

WARNING:

The Extension Cord should NEVER be connected to any product secured to a diver due to safety concerns.

The cable or connected product could become entangled underwater creating an extremely dangerous situation as a diver may be unable to free themselves.

DO NOT use the Extension Cord with the Ikelite Pro Video-Lite or SpD cave light if the battery pack is secured to the diver because of the potentially dangerous situation described above.

DO NOT remove the extension cord from the connected products underwater or when wet. Connections are NOT waterproof when disconnected underwater.

DO NOT leave the cord connected for prolonged periods. Otherwise, the cord may freeze to the connected products. After each dive, disconnect the cord and lightly lubricate the connector threads. Never use spray lubricant.

If using a non-TTL Ikelite Substrobe, follow all warnings referenced in the instruction manuals of the products being connected.

DO NOT use a TTL cord in conjunction with a non-TTL Substrobe.

DO NOT use the Remote TTL Slave in conjunction with a non-TTL Substrobe.

Ikelite Limited Warranty

This product is warranted against any manufacturing defects for a period of one year from the original date of purchase. Defective products should be returned prepaid to Ikelite. Ikelite will, at its discretion, repair or replace such products, and will return to customer prepaid. All other claims of any nature are not covered. Except as mentioned above, no other warranty expressed or implied, applies to this Ikelite product.

Ikelite Technical Support

E-mail: ikelite@ikelite.com
 Phone 317.923.4523
 Fax 317.924.7988



Ikelite Underwater Systems
 50 West 33rd Street
 Indianapolis, IN 46208 USA

Lubricants

- We recommend you use **only** Ikelite lubricant on Ikelite products. Some other brands may cause the o-rings to swell and not seal properly.

Never use spray lubricants. The propellant ingredient in spray lubricants can cause swelling of o-rings.