




Digital Housing

Supplemental Instructions

6210.61 Sony DSC-W610

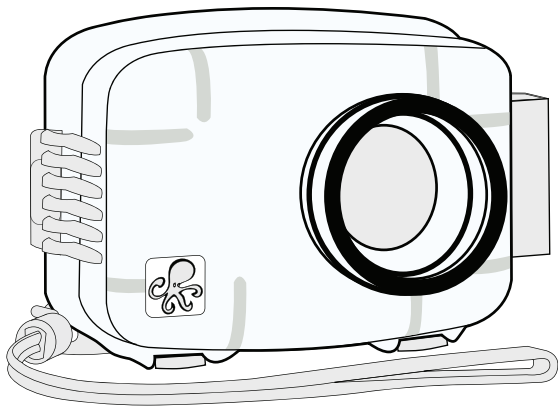

Size and Weight

Width6.2 in. (157mm) including controls

Height4.4 in. (112mm) including controls


Depth3.8 in. (97mm) including controls & lens port

Weight1.2 lb (544g)


BuoyancySlightly positive in fresh water

Parts of the Housing

Front View

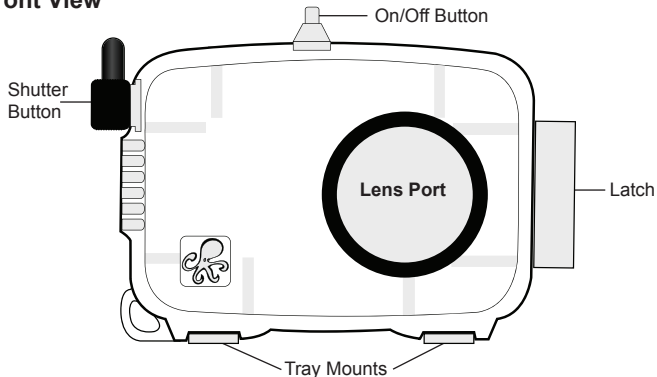


Back View

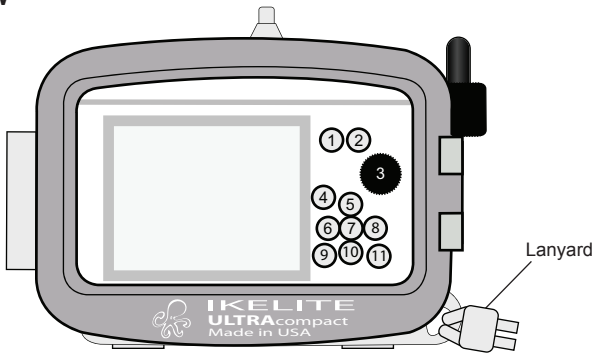

- | | | |
|---------------------|--------------|------------------|
| 1. Zoom (wide) | 5. Display ▲ | 9. Menu Button |
| 2. Zoom (telephoto) | 6. Smile ◀ | 10. Self-Timer ▼ |
| 3. Mode Switch | 7. Set ● | 11. Delete 🗑️ |
| 4. Playback ▶ | 8. Flash ⚡ ▶ | |

Initial Camera Settings

- Insert and Format an SD memory card.
- Set Date and Time.
- Set REC Mode to “P” Program Auto.
- Set Still Image Size to “14M.”
- Set Burst Settings to “Single.”
- Set ISO to “80.”
- Set White Balance to “WB Auto.”
- Set Focus to “Center AF.”
- Set Metering Mode to “Center.”
- Set DRO to “DRO standard.”
- Set Flash to “On  always use flash.”
- Set Red-Eye Reduction to “Off.”

NOTE: If overexposure occurs, use “-” exposure compensation and/or back away from your subject and zoom in. When using an AF35 strobe or manual controller, turn the power down.

External Accessory Lenses

- Attach 46mm threaded #6420.46 Ikelite W-20 Wide-Angle Lens or other compatible lenses directly to the front of the port.
- Attach 67mm threaded #6420 Ikelite W-20, Inon Type II and Epoque wide-angle lenses using the #9306.81 port adapter. This adapter may also be used to attach other compatible 67mm threaded macro lenses.
- Attach bayonet style Inon macro or UWL-100 28AD, UWL-105AD and UFL-165AD wide angle or macro lenses using the #9306.79 port adapter.


Moderate to extreme vignetting (shading in the corners) will be present in the widest setting when using an external accessory lens. This effect can be eliminated by zooming in slightly.

AF35 Strobe Package 4035

The AutoFlash AF35 kit is a great compliment, and an effortless, affordable way to add a flash to your new Ikelite point and shoot camera system. Everything you need to get started is in the box. Just attach it to the bottom of your housing and start taking pictures!

AF35 AutoFlash kit includes:

AF35 strobe - Flex arm - AutoFlash sensor
Handle with rubber grip - Tray (single or dual)
Mounting hardware.



A full range of accessories is available to support your housing. Please visit <http://www.ikelite.com> to see the most current information about recommended accessories for your housing.

Ikelite Technical Support

Email: ikelite@ikelite.com

Phone 317.923.4523

Fax 317.924.7988



Ikelite Underwater Systems
50 West 33rd Street
Indianapolis, IN 46208 USA

www.ikelite.com