




Digital Housing

Supplemental Instructions

6214.05 Sony DSC-WX50

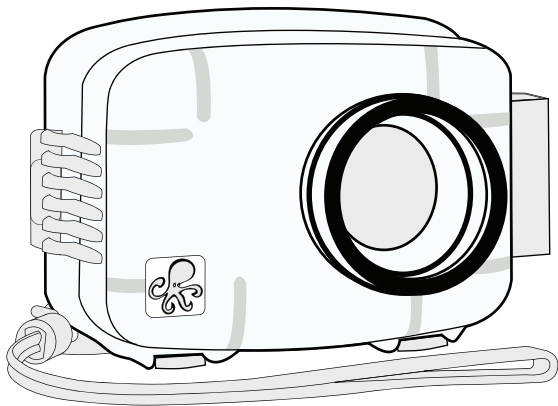


Size and Weight


Width	5.8 in. (147mm) including controls
Height	4.4 in. (112mm) including controls
Depth	3.7 in. (94mm) including controls & lens port
Weight	1.1 lb (499g)
Buoyancy	Slightly positive in freshwater

Parts of the Housing

Front View

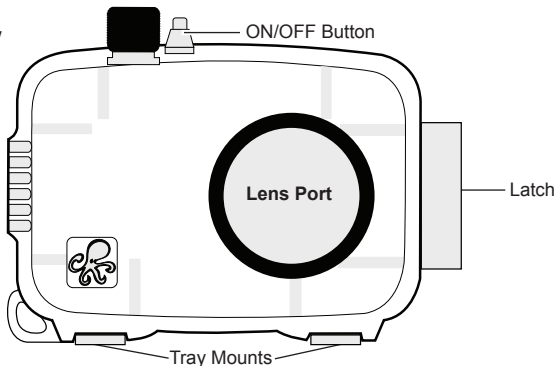

Back View

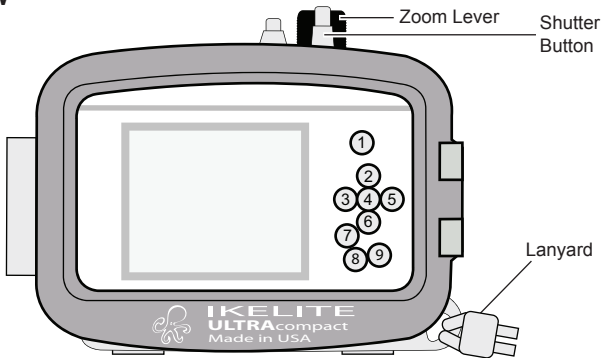

1. Movie Button
2. DISP
3. Shooting Settings
4. Set
5. Flash
6. Self-timer
7. MENU Button
8. Delete
9. Playback

- Note: No control is provided for the Mode Switch or Control Wheel. Use the Movie Button to switch between shooting modes.

Initial Camera Settings (before placing camera in housing)

- Insert and Format an SD memory card.
- Set Date and Time.
- Set REC Mode to “P” Program Auto.
- Set Still Image Size to “16M.”
- Set ISO to “100.”
- Set White Balance to “WB Auto.”
- Set Focus to “Center AF.”
- Set Metering Mode to “Center.”
- Set Smile Shutter to “Off.”
- Set AF Illuminator to “Off.”
- Set Digital Zoom to “Off.”
- Set Red-Eye Reduction to “Off.”
- Set Flash to “On ⚡ Always use flash.”

NOTE: If overexposure occurs, use “-” exposure compensation “EV” and/or back away from your subject and zoom in. When using an AF35 strobe or manual controller, turn the power down.

External Accessory Lenses

- Attach 46mm threaded #6420.46 Ikelite W-20 Wide-Angle Lens or other compatible lenses directly to the front of the port.
- Attach 67mm threaded #6420 Ikelite W-20, Inon Type II and Epoque wide-angle lenses using the #9306.81 port adapter. This adapter may also be used to attach other compatible 67mm threaded macro lenses.
- Attach bayonet style Inon macro or UWL-100 28AD, UWL-105AD and UFL-165AD wide angle or compatible macro lenses using the #9306.79 port adapter.


Moderate to extreme vignetting (shading in the corners) will be present in the widest setting when using an external accessory lens. This effect can be eliminated by zooming in slightly.

AF35 Strobe Package 4035

The AutoFlash AF35 kit is a great compliment, and an effortless, affordable way to add a flash to your new Ikelite point and shoot camera system. Everything you need to get started is in the box. Just attach it to the bottom of your housing and start taking pictures!

AF35 AutoFlash kit includes:

AF35 strobe - Flex arm - AutoFlash sensor
Handle with rubber grip - Tray (single or dual)
Mounting hardware.



A full range of accessories is available to support your housing. Please visit <http://www.ikelite.com> to see the most current information about recommended accessories for your housing.

Ikelite Technical Support

Email: ikelite@ikelite.com

Phone 317.923.4523

Fax 317.924.7988



Ikelite Underwater Systems
50 West 33rd Street
Indianapolis, IN 46208 USA

www.ikelite.com