

Ikelite Digital Housing


supplemental instructions

for

#6230.62 Olympus Stylus Tough-6020, U Tough-6020,
mju Tough-6020



#6231.30 Olympus Stylus Tough-3000, U Tough-3020,
mju Tough-3020

ULTRAccompact Digital Housing

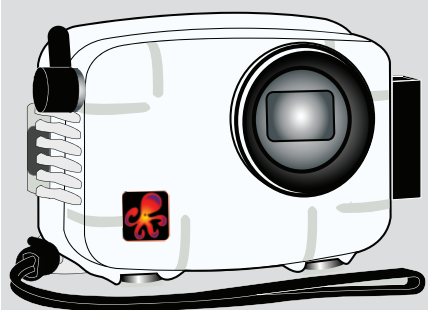

Housing Controls

All controls provided except the "?" button - Camera/Menu Guide.

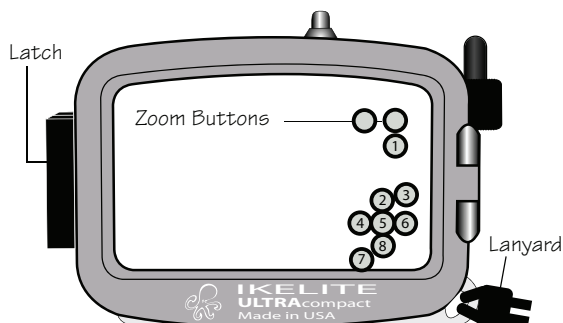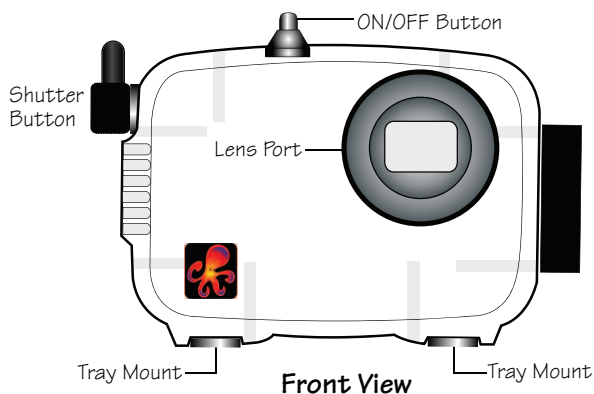

- | | | |
|-----------------------|-----------------|-----------|
| [1] Movie Record | [4] Left Arrow | [7] Menu |
| [2] INFO | [5] OK/Func | [8] Erase |
| [3] Shooting/Playback | [6] Right Arrow | |

Back View

Camera Setup

1. Set camera to "P" mode (camera icon).
 2. Set ISO to 80.
 3. Set camera to Macro Mode (not Super Macro).
 4. Set White Balance to "Auto".
 5. Set Flash to "Fill In" (lightning bolt displayed).
 6. Set AF Mode to "Spot".
 7. Turn ESP off (set to "SPOT", the dot inside the rectangle).
- Macro Mode can be left on and does not adversely affect distance focus. Flash will NOT fire in "Super-Macro" mode.
 - If close-up subjects are over-exposed, back away, zoom in, and then reshoot.

Battery Warning

Turn the camera on before placing it in the housing to make sure the battery is charged and installed correctly.

Ikelite W-20 Wide-Angle Conversion Lens #6420

For increased angle of coverage, color, and clarity, add the Ikelite W-20 #6420, or other 67mm wide-angle conversion lenses. Ikelite 67mm Threaded Port Adapter #9306.78 is required to attach 67mm conversion lenses to the housing port.

#9306.78 67mm Threaded Port Adapter

Allows attaching Ikelite W-20 Wide-Angle Conversion Lens #6420 with 67mm threads. Also allows attachment of Epoque, Type II Inon screw-on lenses, and macro lenses or diopters with 67mm threads. Includes larger size removable flash deflector.

#9306.85 Bayonet Port Adapter


Allows attaching INON UWL-105 AD, UWL-100 28AD, and UFL-165AD bayonet mount lenses.

NOTE: Slight edge softness around the picture edges is normal in some situations with Conversion Lenses. Vignetting can occur with the camera in it's widest angle setting. Zoom in to eliminate.

AF35 Strobe Package #4035

The AutoFlash AF35 kit is a great compliment, and an effortless, affordable way to add a flash to your new Ikelite point-and-shoot camera system. Everything you need to get started is in the box. Just attach it to the bottom of your housing and start taking pictures!

#4035 AF35 kit includes the AF35 strobe, Flex arm, AutoFlash sensor, Handle with rubber grip, Single Tray, and Mounting hardware.

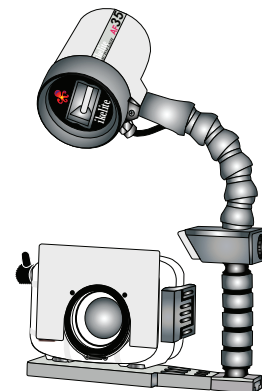

Please Read If Using an EV-Controller

Olympus Tough 3000, 6020, and 8010 model cameras may require an EV-Controller resistor update if your strobe is not firing when connected to the EV-Controller. Your DS strobe can be fired even when the update is needed by switching the EV-Controller to non-preflash mode. You can then fire your DS strobe in all manual power settings EXCEPT full power.

Go to www.ikelite.com for complete strobe and accessory info.



Ikelite Underwater Systems
50 W 33rd Street
Indianapolis, IN 46208 USA

When returning products send "attn. Repair Dept."

"general questions" e-mail: ikelite@ikelite.com
www.ikelite.com
317-923-4523