




Digital Housing

Supplemental Instructions



6241.13 Canon A1300

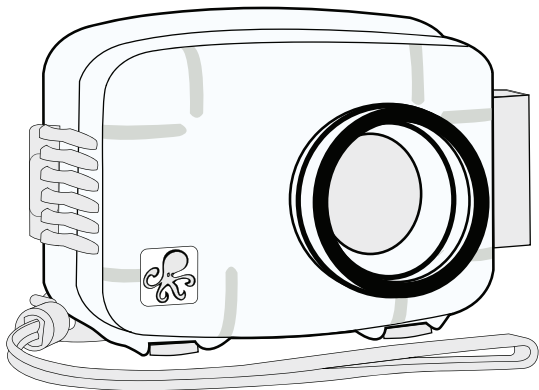






Size and Weight

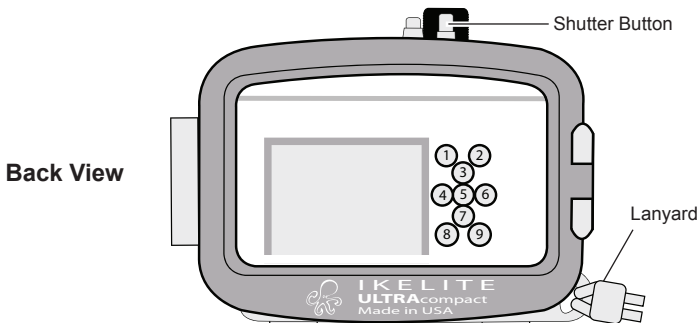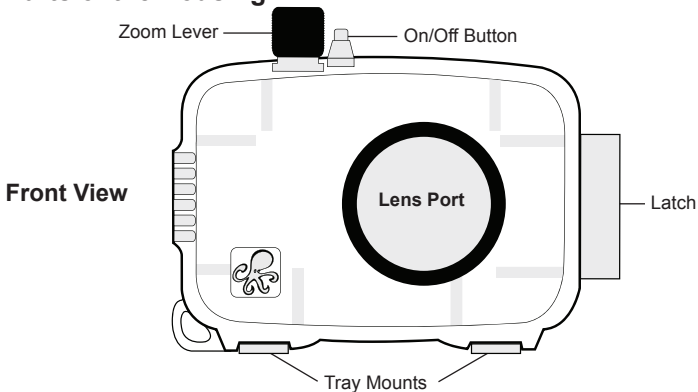
Width	5.8 in. (147mm) including controls
Height	4.6 in. (117mm) including controls
Depth	3.8 in. (97mm) including controls & lens port
Weight	1.1 lb. (499g)
Buoyancy	Slightly positive in freshwater


Parts of the Housing



1. Movie Button
2. ? (Help) Button
3.  ▲ (Auto) / Erase Up Button
4.  ◀ (Macro) / Left Button
5. ● FUNC./ SET Button
6.  ▶ (Flash) / Right Button
7.  **DISP.** (Display) / Down Button
8.  (Playback) Button
9. **MENU** Button

Initial Camera Settings

- Insert fully charged battery and formatted SD card.
- Set Date and Time.
- Set Shooting Mode to “P” Program.
- Set ISO to 100 and White Balance to auto “AWB.”
- Set the Square to “Single Shot.”
- Set Resolution to “L” and “1280.”
- Set AF Frame to “Center” and Digital Zoom to “Off.”
- Set AF Point Zoom to “Off” and Servo AF to “Off.”
A strobe focusing light is recommended to assist AF underwater.
- Set Lamp Setting to “Off” and Red-Eye Correction to “Off.”
- Set Light Metering to “Center Weighted.”
- Set Review to “5 Seconds” and Review Info to “Off.”
- Set Blink Detection and Grid Lines to “Off.”
- Set Flash to “On”  flash always fires.”
- In Power Saving, set Auto Power Down to “Off.”
- In Power Saving, set Display Off to “3 min.”

Note: Enable Macro  mode when shooting close-up subjects. If overexposure occurs, back away from the subject and zoom in and/or use “-” Exposure Compensation.

External Accessory Lenses

Attach 46mm threaded #6420.46 Ikelite W-20 Wide-Angle Lens or other compatible lenses directly to the front of the port.

Attach 67mm threaded #6420 Ikelite W-20, Inon Type II and Epoque wide-angle lenses using the #9306.81 port adapter. This adapter may also be used to attach other compatible 67mm threaded macro lenses.

Attach bayonet style Inon macro or UWL-100 28AD, UWL-105AD and UFL-165AD wide angle or macro lenses using the #9306.79 port adapter.


Slight vignetting (shading in the corners) may be present in the widest setting when using an external accessory lens. This effect can be eliminated by zooming in slightly.

AF35 Strobe Package 4035

The AutoFlash AF35 kit is a great compliment, and an effortless, affordable way to add a flash to your new Ikelite point and shoot camera system. Everything you need to get started is in the box. Just attach it to the bottom of your housing and start taking pictures!

AF35 AutoFlash kit includes:

AF35 strobe - Flex arm - AutoFlash sensor
Handle with rubber grip - Tray (single or dual)
Mounting hardware.

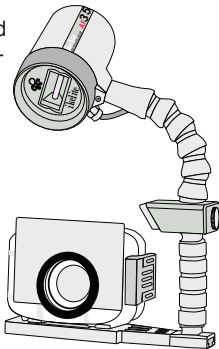

A full range of accessories is available to support your housing. Please visit www.ikelite.com to see the most current information about recommended accessories for your housing.

Ikelite Technical Support

Email: ikelite@ikelite.com

Phone 317.923.4523

Fax 317.924.7988



Ikelite Underwater Systems
50 West 33rd Street
Indianapolis, IN 46208 USA

www.ikelite.com