



6270.06 Underwater Housing for Panasonic LUMIX TS5, TS6, FT5, FT6 Supplemental Instructions

Supplied Accessories

- 0200.02 Vinyl Port Cover
- 0321.10 Safety Lanyard
- Flash Diffuser
- Flash Deflector
- 0184.1 Silicone Lubricant
- Replacement control tips/sleeves

Size and Weight

Width5.9 in (150 mm) including controls

Height4.7 in (119 mm) including controls


Depth.....3.0 in (78 mm) including controls & lens port

Weight1 lb. (454g)


Buoyancy.....Slightly positive in fresh water

Parts of the Housing

Front View

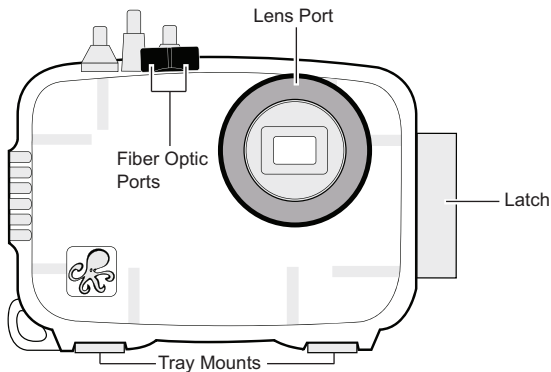

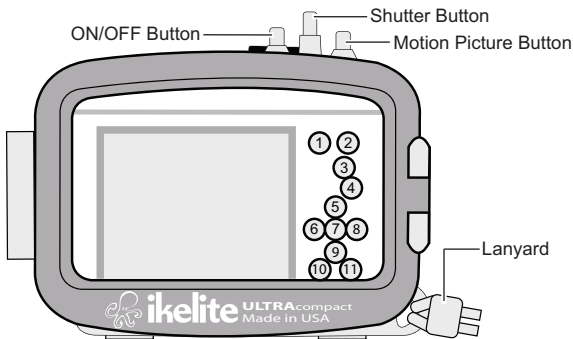

Back View



1. Zoom Button (Wide)
2. Zoom Button (Telephoto)
3. Playback Button
4. MODE Button
5. Cursor Up / Exp. Comp.
6. Cursor Left / Self-timer
7. MENU/SET Button
8. Cursor Right / Flash Setting
9. Cursor Down / Macro Mode
10. DISP. Display Button
11. Q. MENU / Delete

Initial Camera Settings (before placing camera in housing)

- Set Rec Mode to “P” Program AE.
- **In Menu Rec:**
 - Set Aspect Ratio to “4:3” and Picture Size to “16m.”
 - Set ISO Sensitivity to “200” and WB White Balance to “AWB.”
 - Set AF Mode to “1-Area.”
 - Set Quick AF to “ON.”
 - Set Face Recognition to “OFF.”
 - Set i.Exposure to “OFF.”
 - Set Min. Shtr Speed to “1/30.”
 - Set i.Resolution to “OFF.”
 - Set Digital Zoom to “OFF.”
 - Set AF Assist Lamp and Red-Eye Removal to “OFF.”
 - Set Image Stabilizer to “ON.”
 - In Clock Set, set the date and time.
- **In Menu Setup:**
 - Set LED Light to “OFF.”
 - In ECO Economy, set Auto Power Off to “5 MIN.”
 - Set Monitor Power Save to “OFF.”
 - Set Auto Review to “HOLD.”
 - Insert and Format an SDHC memory Card.
- Set Flash to Fill to “Forced Flash On .
- Set Macro Mode to “AF Macro .

Note: If overexposure occurs adjust exposure compensation and/or back away from the subject and zoom in.

A strobe focusing light is recommended to assist autofocus underwater.

External Accessory Lenses


Due to the nature of the camera's lens, external wide angle lenses provide no significant advantage.

AF35 Strobe Package #4035

The AutoFlash AF35 kit is a great compliment, and an effortless, affordable way to add a flash to your new Ikelite point and shoot camera system. Everything you need to get started is in the box. Just attach it to the bottom of your housing and start taking pictures!

AF35 AutoFlash kit includes:

AF35 strobe - Flex arm - AutoFlash sensor
Handle with rubber grip - Tray (single or dual)
Mounting hardware.



A full range of accessories is available to support your housing. Please visit **ikelite.com** to see the most current information about recommended accessories for your housing.

Customer Support

Please read the troubleshooting section of the “Instruction Manual” before contacting Ikelite.



Ikelite Underwater Systems
50 West 33rd Street
Indianapolis, IN 46208 USA

ikelite.com

© 2015 Ikelite Underwater Systems

6270.06_Panasonic_TS5_TS6_1-0515