




Digital Housing

Supplemental Instructions

6280.20 Nikon L19/L20 ULTRAcompact Housing

6280.21 Nikon L20 ULTRAcompact Digital Package

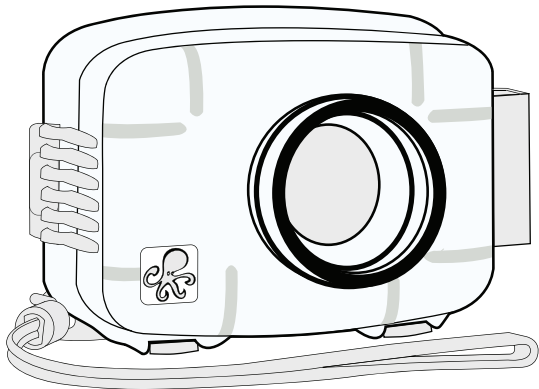

Size and Weight

Width6.0 in. (152mm) including controls


Height4.4 in. (112mm) including controls

Depth3.4 in. (86mm) including controls & lens port


Weight1.5 lb (680g)

BuoyancySlightly positive in fresh water

Parts of the Housing

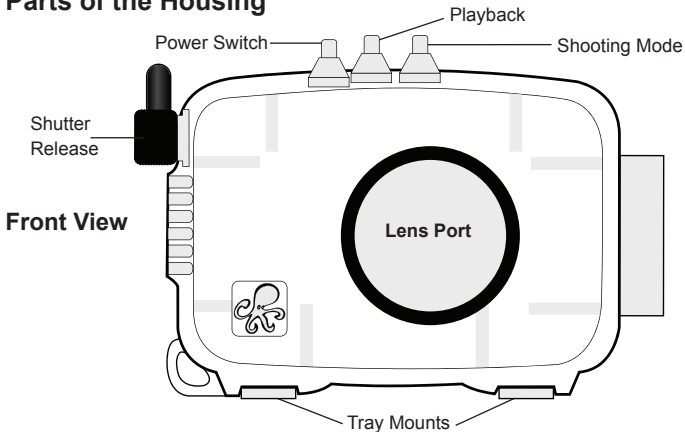

Back View

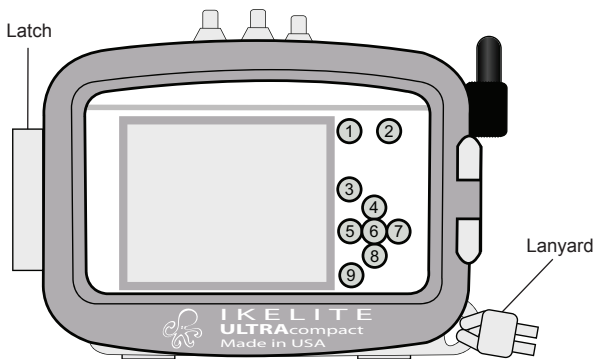




1. Zoom Wide
 2. Zoom Tele
 3. Menu
- 2**



4. Flash ⚡, ▲
5. Self-timer, ◀
6. OK, ●

7. Exposure Comp. ⚡, ▶
8. Macro 🍃, ▼
9. Delete 🗑️

Initial Camera Settings

- Set camera to “Auto  mode”, NOT Easy Auto or Scene Modes.
- Set camera to “Macro  mode.”
- Set White Balance to “Auto.”
- Set Flash Mode to ON “.”
- Set Image Mode to “High.”

A strobe focusing light is recommended to assist AF underwater.

Note: Camera will focus far away even if “Macro  mode” is on. It is best to leave “Macro  mode” on. You can back away from the subject and zoom in to avoid overexposure, if necessary.

Ikelite W-20 Wide-Angle Conversion Lens 6420.46

Your new Ikelite housing features a 46mm threaded port for attachment of external 46mm accessory wet lenses such as the Ikelite 46mm W-20 lens 6420.46. This lens is recommended and does not vignette at widest angle setting.

9306.81 67mm Threaded Adaptor

Allows attaching Ikelite W-20, Epoque, and Type II Inon screw-on lenses with 67mm threads. Includes larger size removable flash deflector. No vignetting noted with these lenses.

9306.79 Bayonet Mount Adaptor

Allows attaching of the Inon UWL-105AD, UFL-165AD, UWL-100AD, and macro bayonet style lenses. Includes larger size removable flash deflector. No vignetting noted with these lenses.


NOTE: External wide angle conversion lenses increase angle of coverage, so you can get much closer to your subject while still fitting everything in the frame. Add the Ikelite W-20 or other wide-angle lenses with an Ikelite accessory port adapter for increased angle of coverage, color, and clarity.

Slight vignetting may occur at widest angle camera lens setting with some conversion lenses. Zoom in slightly to eliminate, or crop the image in post-processing. Also, slight edge softness around the picture edges in some situations is normal.

AF35 Strobe Package #4035

The AutoFlash AF35 kit is a great complement, and an effortless, affordable way to add a flash to your new Ikelite point and shoot camera system. Everything you need to get started is in the box. Just attach it to the bottom of your housing and start taking pictures!

A full range of accessories is available to support your housing. Please visit http://www.ikelite.com/web_two/nik_I20.html to see the most current information about recommended accessories for your housing.



L22//L24 - Strobe Compatibility Notes:

AutoFlash AF35 Kits with a Serial Number below 1900 may overexpose when used with the Nikon Coolpix L19, and L20 camera system. AF35 Kits with a Serial Number of 1900 or greater do not require modification for use with the Nikon L19 or L20 camera. If necessary, strobes may be returned to Ikelite postage prepaid for a complimentary electronics update. Please include a brief letter of explanation with full contact information, and return to:



Ikelite Underwater Systems
Attention: Service Department
50 West 33rd Street
Indianapolis, IN 46208

Email: ikelite@ikelite.com

www.ikelite.com

Nikon_L19/L20_4-0811