




# Digital Housing

## Supplemental Instructions

### 6282.62 Nikon S6200

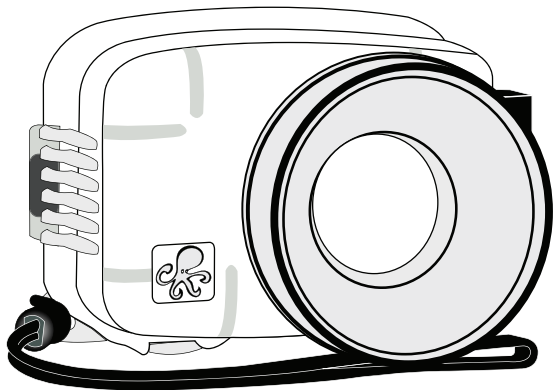


### Size and Weight


Width .....	6.2 in. (157mm) including controls
Height .....	4.5 in. (114mm) including controls
Depth .....	5.0 in. (127mm) including controls & lens port
Weight .....	1.6 lb. (726g)
Buoyancy .....	Near Neutral in freshwater





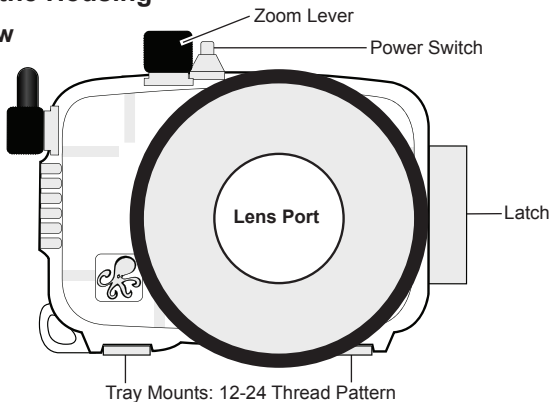



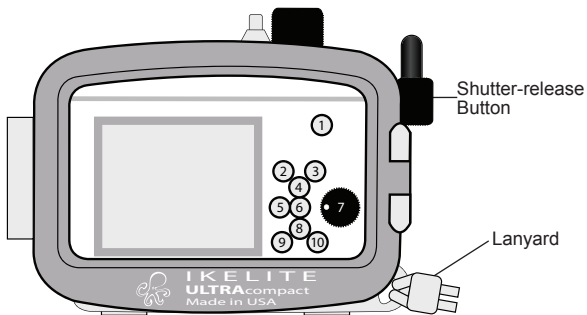


## Parts of the Housing

### Front View





### Back View



1. Movie-record Button
2. Shooting Mode Button 
3. Playback Button 
4. Flash Mode , 
5. Self-timer, 
6. OK (apply selection) Button 
7. Rotary Multi Selector, , 
8. Macro , 
9. Menu Button
10. Delete Button 

## Initial Camera Settings

- Install a fully charged camera battery.
- Insert and format a compatible memory card.
- Set Date and Time.
- Set Shooting Mode to Auto Mode .
- Set Image Mode to 16m.
- Set White Balance to "AUTO."
- Set Continuous to "S" Single.
- Set Metering Mode to "Center".
- Set ISO to "80."
- Set AF area mode to "Center."
- Set Autofocus mode to "AF-S" Single AF.
- Set AF assist to "Off."
- Set Flash to forced ON (flash always fires) .

**Notes:** If overexposure occurs, adjust the "Exposure Compensation" setting accordingly, or back away from the subject and zoom in.

A strobe focusing light is recommended to assist autofocus underwater.

## WD-4 Wide-Angle Conversion Dome 6430.4

The removeable WD-4 corrects light refraction underwater, restoring the camera's original angle of coverage. Approximately 3/4 of the camera's zoom range can be used with the dome in place. Slight vignetting may occur at camera's widest angle setting.



## External Macro Adaptor 9306.82


Allows attachment of 67mm threaded macro lenses from Inon and Epoque. NOT for use with 67mm threaded wide-angle lenses.



**Note:** Other wide-angle conversion or accessory lenses cannot be used with this housing.

## **AF35 Strobe Package #4035**

The AutoFlash AF35 kit is a great compliment, and an effortless, affordable way to add a flash to your new Ikelite point and shoot camera system. Everything you need to get started is in the box. Just attach it to the bottom of your housing and start taking pictures!

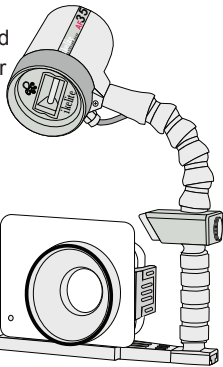

### **AF35 AutoFlash kit includes:**

AF35 strobe - Flex arm - AutoFlash sensor  
Handle with rubber grip - Tray (single or dual)  
Mounting hardware.

A full range of accessories is available to support your housing. Please visit [www.ikelite.com](http://www.ikelite.com) to see the most current information about recommended accessories for your housing.

## **Ikelite Technical Support**

E-mail: [ikelite@ikelite.com](mailto:ikelite@ikelite.com)

Phone 317.923.4523

Fax 317.924.7988



**Ikelite Underwater Systems**  
**50 West 33rd Street**  
**Indianapolis, IN 46208 USA**

[www.ikelite.com](http://www.ikelite.com)

6282.62\_Nikon\_S6200\_1-1111