




Digital Housing Supplemental Instructions 6241.26 Canon A2600

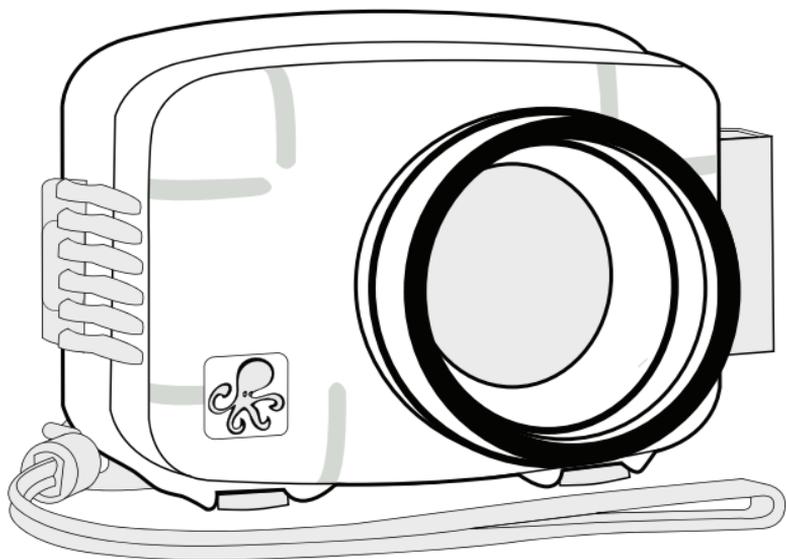

Thank you for your purchase of Ikelite equipment. Please read the "Instruction Manual" and "Supplemental Instructions" completely before attempting to operate or dive with this product.


Supplied Accessories

- 0200 Vinyl Port Cover
- 0321.10 Safety Lanyard
- Flash Diffuser
- Flash Deflector
- 0184.1 Silicone Lubricant
- 0920.3 Control tips (3)
- 0920.1 Control Tip
- 5 Small Control Sleeves

Housing Specifications

Controls	All camera functions except ? button
Width	5.9in (150mm) including controls
Height	4.6in (117mm) including controls
Depth	3.8in (97mm) including controls
Weight	1.2lb (544g)
Buoyancy	Slightly positive in freshwater
Depth Rating	200ft (60m)
Built-in Flash	Yes
Strobe Connection	Slave
Tray Mounting	12-24 thread with 3in spacing (76mm)
Main O-Ring	0132.45
Port O-Ring	0134.33
Port Outer Diameter	3.0" (76mm)
Use 46mm Lenses.....	No
Use 67mm Lenses.....	Yes
Use Bayonet Lenses	No

Parts of the Housing

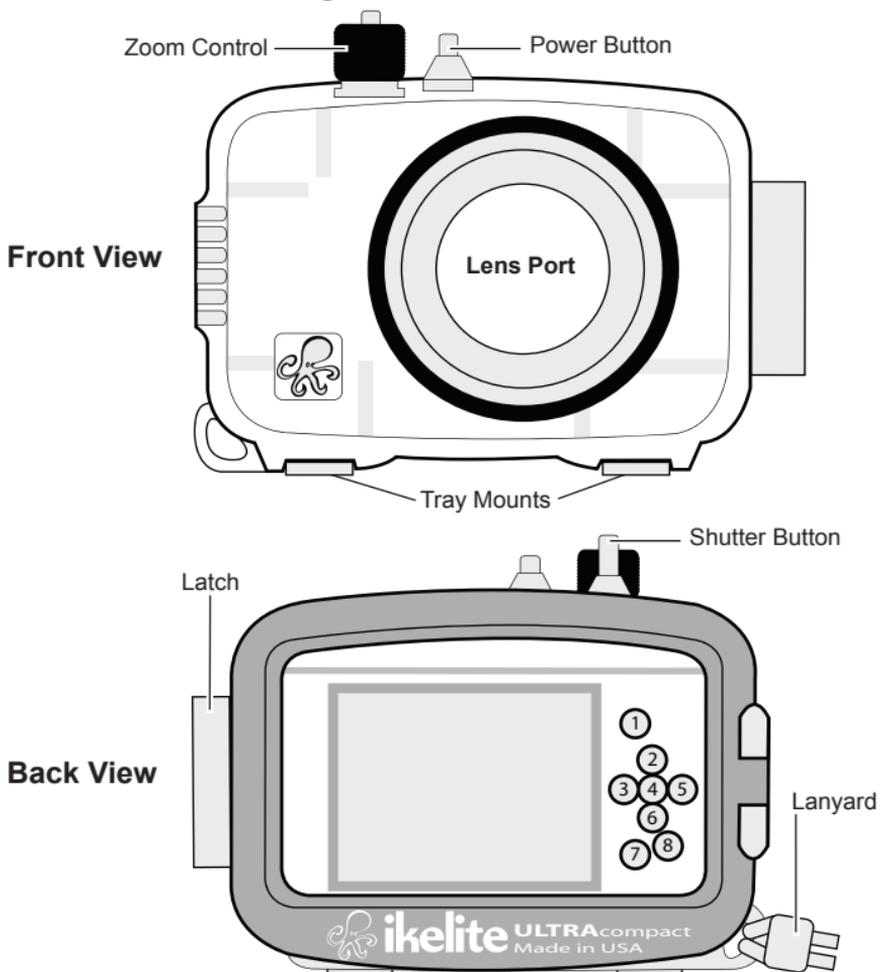

- | | |
|---|---|
| 1.  Movie Button | 5.  Flash, Right Button |
| 2.  Auto, Single Erase, Up Button | 6.  DISP. , Down Button |
| 3.  ECO Button | 7.  Playback Button |
| 4. FUNC./SET Button | 8. MENU Button |

Initial Camera Settings (before placing camera in housing)

- Insert fully charged battery.
- Insert and format a SD or SDHC memory card.
- Set Date and Time.
- Set Lens Retract to “0 sec.”
- Power Saving: Set Auto Power Down to “Off” and Display Off to “3 min.”
- Set Rec. Mode to “P” Program.
- Set Focus Range to “Normal.”
- Set Drive Mode to “Single Shot.”
- Set Light Metering to “Center Weighted.”
- Set White Balance to auto “AWB.” If more accurate colors are desired, we recommend setting manual white balance underwater using a white slate or white sandy bottom. Manual white balance should be reset for each working depth due to color absorption caused by the water. When adding a UR-Pro color filter, reset manual white balance.
- Set ISO to “200.”
- Set Resolution to “L” 16M and Movie Quality to “1280.”
- Set AF Frame to “Center” and Digital Zoom to “Off.”
- Set AF Point Zoom to “Off” and Servo AF to “Off.”
A strobe focusing light is recommended to assist AF underwater.
- Set Continuous AF to “Off.”
- Set Lamp Setting to “Off” and Red-Eye Correction to “Off.”
- Set i-Contrast to “Off.”
- Set Review image after shooting to “8 Seconds.”
- Set Blink Detection and Grid Lines to “Off.”
- Set Flash to “On”  Flash always fires.”

Note: Enable Macro  mode when shooting close-up subjects. If overexposure occurs, back away from the subject and zoom in slightly. If overexposure continues, use “-” exposure compensation.

External Accessory Lenses

W-20 and W-30 Wide-Angle Conversion Lenses


The front of the lens port accepts the Ikelite 6420 W-20, 6430 W-30, and other 67mm threaded wide angle or macro lenses without the need for an adapter. An external wide angle conversion lens increases angle of coverage so you can get closer to the subject while still fitting everything in the frame.

Slight to moderate vignetting will occur at widest angle camera lens setting with these lenses. Zoom in to eliminate, or crop the image in post processing. NOTE: The A2600 will not vignette at camera's widest angle setting **underwater** when using the W-30 lens.

Bayonet mount lenses cannot be used with this housing.


Please visit www.ikelite.com for additional information.

Ikelite 6430 W-30 Conversion Lens

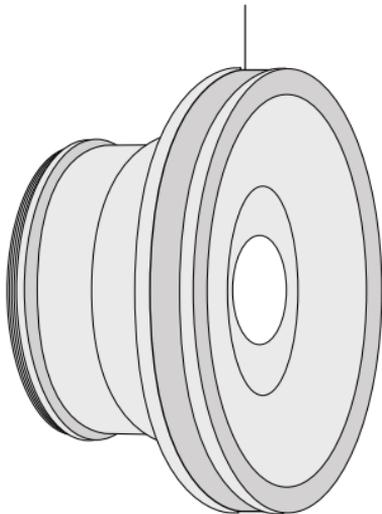

AF35 Strobe Package 4035

The AutoFlash AF35 kit is a great compliment, and an effortless, affordable way to add a flash to your new Ikelite point and shoot camera system. Everything you need to get started is in the box. Just attach it to the bottom of your housing and start taking pictures!

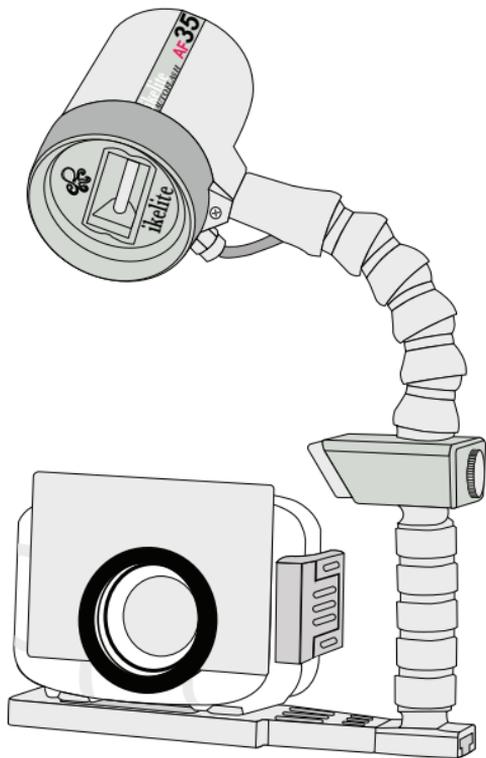

The AF35 Strobe Package is available to support your housing along with a full range of accessories. Please visit www.ikelite.com to see the most current information about recommended accessories for your housing.

Customer Support

Please read the troubleshooting section of the “Instruction Manual” before contacting Ikelite.

Limited Warranty

This Ikelite product is warranted against any manufacturing defects for a period of one (1) year from the original date of purchase. Defective products should be returned to Ikelite postage paid. Ikelite will, at its sole discretion, repair or replace such products, and will return to customer postage paid. All other claims of any nature are not covered. Except as mentioned above, no other warranty expressed or implied applies to this Ikelite product.



**Ikelite Underwater Systems
50 West 33rd Street
Indianapolis, IN 46208 USA**

www.ikelite.com

© 2013 Ikelite Underwater Systems

6241.26_ Canon_A2600_Supplemental_1-0513