


Ikelite Digital Housing

supplemental instructions

for

**#6240.99 Canon SD990 IS, IXUS 980 IS, IXY 3000 IS
ULTRAcompact Digital Housing**

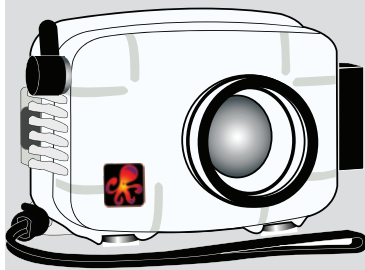

Camera Setup

1. Turn camera mode dial to P/M
 2. Use "P" Program mode. To rotate through camera modes when the camera is in the housing, push and hold button #1, and then left or right toggle using buttons #4 and #6 (page #3).
 2. ISO can be set as low as 80
 3. Set flash to "on" (lightning bolt only), using button #6.
- NOTE:** If over-exposure occurs, turn on the "flower icon" macro mode (button #4), which sets the aperture to f8. If over-exposure continues, back away from the subject and zoom in.

Ikelite W-20 Wide-Angle Conversion Lens #6420.46

Your new Ikelite housing features a 46mm threaded port for attachment of external 46mm accessory wet lenses such as the Ikelite 46mm W-20 lens #6420.46. External wide angle conversion lenses increase angle of coverage, so you can get much closer to your subject while still fitting everything in the frame. Add the Ikelite W-20 or other wide-angle lenses with an Ikelite accessory port adaptor for increased angle of coverage, color, and clarity.

NOTE: No vignetting occurs when using the 46mm Ikelite W-20 Wide-Angle Conversion Lens.

#9306.81 67mm Threaded Adaptor

Allows attaching Ikelite W-20, Epoque, and Type II Inon screw-on lenses with 67mm threads. Includes larger size removable flash deflector.



#9306.79 Bayonet Mount Adaptor

Allows attaching of the Inon UWL-105AD, UFL-165AD, UWL-100AD, and macro bayonet style lenses. Includes larger size removable flash deflector.

NOTE: Vignetting may occur at widest angle camera lens setting with wide-angle conversion lenses. Zoom in to eliminate, or crop the image in post-processing. Also, slight edge softness around the edges in some situations is normal.

2

Housing Controls

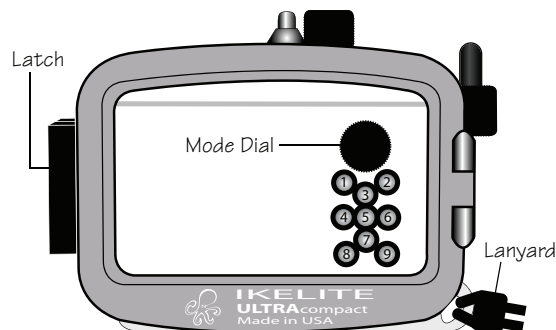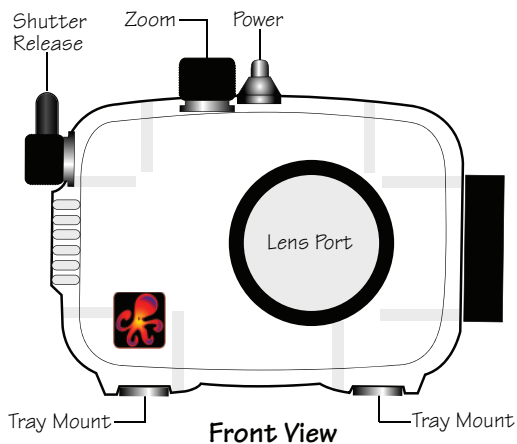

- | | | |
|------------------|------------------|-------------|
| [1] Print/Assign | [4] Macro | [7] Delete |
| [2] Playback | [5] Function/Set | [8] Menu |
| [3] ISO | [6] Flash | [9] Display |

Back View


3

AF35 Strobe Package #4035

The AutoFlash AF35 kit is a great compliment, and an effortless, affordable way to add a flash to your new Ikelite point-and-shoot camera system. Everything you need to get started is in the box. Just attach it to the bottom of your housing and start taking pictures!

AF35 AutoFlash kit includes:

- AF35 strobe
- Flex arm
- AutoFlash sensor
- Handle with rubber grip
- Tray (single or dual)
- Mounting hardware

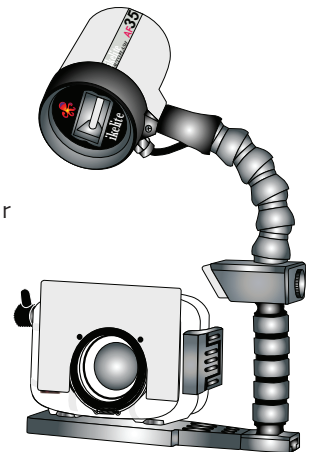

Strobe Compatibility Note:

The DS-200 Substrobe is NOT compatible with this camera system. Compatible strobes include the AF35, DS-51, DS-125, and DS-160.

Go to www.ikelite.com for complete strobe and accessory info.

Ikelite Underwater Systems
50 W 33rd Street
Indianapolis, IN 46208 USA

When returning products send "attn. Repair Dept."

"general questions" e-mail: ikelite@ikelite.com
www.ikelite.com
317-923-4523

ULTRAcompact Supplemental 6240.99-02-0509